Magnetic Holder

for interchangeable knocker mounting

MH-K 40, MH-K 63, MH-K 80


100-160 EN


Page 1 / 1

Date: 13.04.2026

- ✓ **Quick, tool-free attachment of singold knockers without fixed mounting**
- ✓ **Robust construction with magnetic suction cups and ball joints**
- ✓ **High holding force, spring loaded: holds even under heavy impact loads**
- ✓ **Easy handling: carrying handles, easily detachable, maintenance and wear-free**



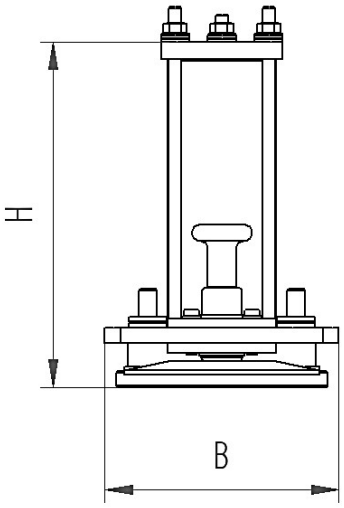

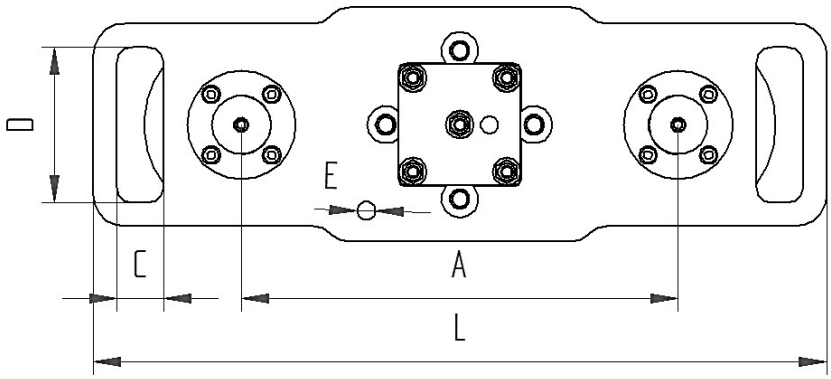

singold – Magnetic Holder

Type	Dimensions in mm							Magnetic force per suction cup	Max. Temp.	Dead weight	Knocker weight	Total weight
	L	B	H	A	C	D	E	[N]	[°C]	[kg]		
MH-K 40	400	140	185	210	30	90	12	290	80 (Note the permissible knocker temp.)	2,75	1,35	4,1
MH-K 63	470	150	221	280	30	100	12	550		4,2	3,6	7,8
MH-K 80	550	180	264	360	30	110	12	1000		6,1	6,6	12,7

Variants

Type	Version	Board	Mounted parts
MH-K 40 MH-K 63 MH-K 80	Standard	Aluminium	Galvanized steel
	Stainless Steel „A2“	Stainless steel	Stainless steel

singold gerätetechnik gmbh, 86830 Schwabmünchen, Germany

Tel.: +49 (0) 8232 / 50 386-0
E-Mail: info@singold-tech.de
Website: www.singold.tech